

## OUR EXPERTISE

Experience that delivers results.

### Market Segments

- Orthopedic (joint and spine)
- Dental
- Cardiovascular
- Veterinary

### Capabilities

- Hydroxylapatite coating (HA)
- Titanium plasma spray coating (TPS)
- Titanium on polyether ether ketone (PEEK)
- Rough porous TPS coating
- Asymmatrix® coating
- Custom coating technologies
- Sintered bead coatings on titanium and Co/Cr
- Passivation per ASTM F-86
- Heat-treating
- Final cleaning and packaging

### Coatings in Development

- Titanium on ultra-high molecular weight polyethylene (UHMWPE)
- Anti-wear ceramic coating

### Special Services

- Staff metallurgist and validation specialist
- FDA consulting and 510k submission
- Package design
- New coating development

## ABOUT ORCHID

Orchid is a worldwide leader of orthopedic medical device outsourcing, providing contract design and manufacturing services. We are a strategic sourcing partner that can handle an entire project or provide services at a single point in the process.

## CONTACT US TODAY

Make your ideas a reality.



### Detroit Office:

23149 Commerce Drive  
Farmington Hills, MI 48335 USA  
Phone: +1 (248) 352-4570

### Memphis Office:

4600 East Shelby Drive, Suite 1  
Memphis, TN 38118 USA  
Phone: +1 (901) 433-1990

### Switzerland Office:

Täferstr 39  
5405 Baden-Dättwil Switzerland  
Phone: +41 (0)56 622 01 33

### China Office:

Gangtian Road 99, Suzhou Industry Park  
Building 17  
Suzhou, Jiangsu, China, 215028  
Phone: +86-512-87181189

E-mail: [sales@orchid-ortho.com](mailto:sales@orchid-ortho.com)  
[www.orchid-ortho.com](http://www.orchid-ortho.com)

## PARTNER WITH US

Unparalleled experience, market-driven solutions and technical innovations.



Orchid's coating divisions have been leaders in the orthopedic industry for decades. Through communication with our customers and suppliers, we continue to develop value-added, innovative technologies and services.

Our newly developed process for applying titanium coating to PEEK spinal implants combines biocompatibility with osteointegration. In addition to developing new coating technologies, we are also experts in the clinical success of hydroxylapatite coating (HA) and the high osseointegration capability of titanium plasma spray (TPS).

If you want custom capabilities, rapid turnaround times, innovative technologies and an excellent track record, We can provide total project partnership right from the start to bring your products to market ahead of the curve.

## Implant Coatings and Surface Treatments

Leaders in the latest surface engineering technologies



# IMPLANT COATINGS AND SURFACE TREATMENTS

Meeting the challenge of implant fixation.

## Sintered Coatings

### Spherical



Bead coating of various sizes that creates a three-dimensional porous structure that can be applied to either titanium or Co/Cr implants.

### Asymmatrix®



An irregular bead coating structure with the added features of an extremely rough surface and increased porosity.


## Sprayed Coatings

### Titanium Plasma Spray (TPS) on metal



Creates interconnected porosity down to the substrate for titanium or Co/Cr implants using commercially pure titanium or Ti6Al4V.

### Hydroxylapatite (HA)

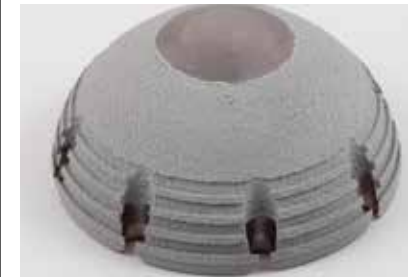

The same mineral found in bone (60-70% of bone is mineral). Bone responds to it as an osteoconductive surface.

### Titanium Plasma Spray (TPS) on PEEK



Creates interconnected porosity down to the substrate for PEEK implants using commercially pure titanium or Ti6Al4V.

<b>Materials</b>	Cp Ti on Ti alloy Co/Cr on Co/Cr	Cp Ti on Ti alloy Co/Cr on Co/Cr	Cp Ti on Ti alloy Cp Ti on Co/Cr Cp Ti on TiCarbide	HA on Ti alloy HA on Co/Cr HA on SS	Cp Ti on PEEK
<b>Attachment Method</b>	High-temperature sintering	High-temperature sintering	Plasma spray	Plasma spray	Plasma spray
<b>Macro-Texture</b>	Smooth, moderately rough	Rough	Rough	Smooth	Rough
<b>Porosity Range (%)</b>	30 – 50	50 – 70	20 – 60	Dense coating	20 – 60
<b>Pore Size Range (µm)</b>	100 – 300	100 – 300	100 - 300	Dense coating	100 - 300
<b>Coating Thickness</b>	> 0.020 in	> 0.020 in	0.005 – 0.038 in	25 – 75 µm	0.005 – 0.038 in

